



Installation Instructions

Custom Bolt Down

Step 1

Lay out tools - You will need:

- 11/16" Open Wrench
- Drill
- 1-7/8" Drill Bit
- 2-3/8" DIA Heavy Duty Slotted Washer (included in packaging)



if top drawer exists - remove it now



Step 2

Drill your holes:

- After determining your preferred lamp placement: Drill tabletop entrance hole and clean the surface

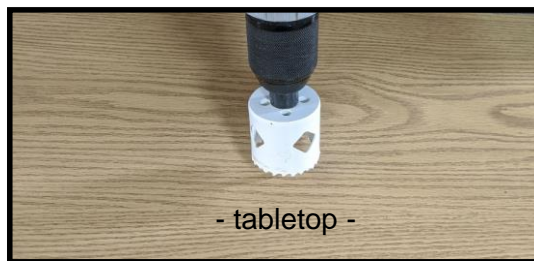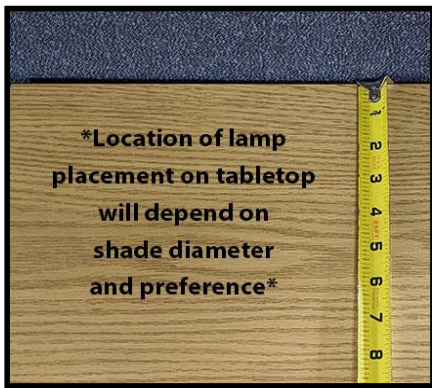

- Turn the furniture to access the backside
- Drill exit hole for lamp plug/cord



Step 3

Placement of lamp and cord:

- Feed cord through top entrance hole
- Place lamp over top hole
- Feed cord through back exit hole



Step 4

Secure Bolt Down lamp to tabletop:

- Fit **slotted washer** (supplied with lamp) around the nipple between standard washer and bottom of tabletop
- Tighten nut with open handle wrench
- Replace top drawer if necessary



Step 5

Clean up and rest at ease knowing that you've provided a home-like atmosphere for your facility and your residents while keeping them safe and secure. Enjoy the safest, most durable theft / tamper-resistant lamp in the industry!



Contact James (ext. 30) with any comments, questions or concerns

PO Box 170083 • Milwaukee, WI 53223
Toll Free: 1-888-330-LAMP (5267) • Phone: (414) 760-3377 • Fax: (414) 760-3380
customerservice@jeslighting.com • www.jeslighting.com